



Spec Formliners, Inc.

Impressive on Concrete


Pattern Number: **1240**

6" Wood Grain Shiplap

6" plank medium woodgrain texture
1" relief



CONCRETE

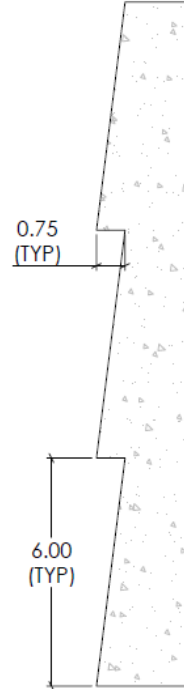

Note: Requires Support - Backer System Available

Visit www.specformliners.com for application guides and technical information

ThermoSpec™
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite™ Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec™ 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec™ Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available


ElastoSpec™ Customized Panel Sizes and Art Panels

**Pattern 1240
Backer Support
US Pat. 9,381,671**

Available Thicknesses:
0.070, 0.090, 0.110, and 0.150



Available Thicknesses:
0.070, 0.090, 0.110, and 0.150

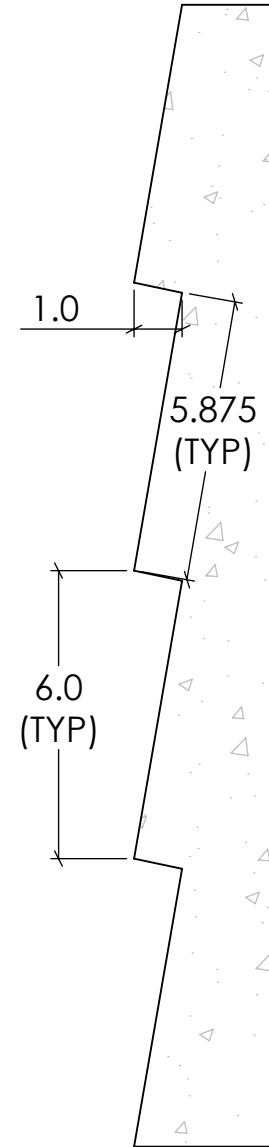


ThermoSpec™

Standard Size 4'x10'
Custom Sizes: Any less than 4'x10'

CONCRETE

Spec Formliners, Inc.
530 E. Dyer Rd., Santa Ana, CA 92707
888-429-9550 Phone 714-429-1460 Fax
www.SpecFormliners.com



**Spec Formliners
INCORPORATED**

DRAWN BY: Mike B. 7/24/2012
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
SPEC FORMLINERS, INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
SPEC FORMLINERS, INC. IS PROHIBITED.

SHEET SIZE
11"x17"
DO NOT
SCALE
SHEET 1 OF 1

Pattern 1240 - A
Woodgrain Shiplap
1.0" Relief

1240_A

REV. 12/11/2012

NOTES:

APPROVAL SIGNATURE:

Please provide a signature in this box to indicate that this drawing has been approved and that Spec Formliners, Inc. may begin production.