

**Spec Formliners, Inc.**

Impressive on Concrete

Attn: To Whom It May Concern  
Re: Regrind Plastic Materials

All ABS and Styrene plastic sheets used in Spec Formliners, Inc. are made from recycled, regrind plastic sheets manufactured by one of our suppliers.

Additionally, we regrind all of our plastic trim at our facility in Santa Ana, CA. It is recycled back to our plastic supplier for re-manufacturing into sheet stock for our production process. The attached cut sheet provides specifications for a standard Spec pattern produced under our environmentally friendly process.

Thank you,

Spec Formliners, Inc

Jessie Ullerich

ÔÔÔ

[JessieUllerich@specformliners.com](mailto:JessieUllerich@specformliners.com)

---

**Impressive On Concrete**





**Spec Formliners, Inc.**

Impressive on Concrete


Pattern Number: **1101**

## Standard Spec Rib

**3/4" (19mm) deep fractured fin  
1-1/2" (38mm) pattern repeat**

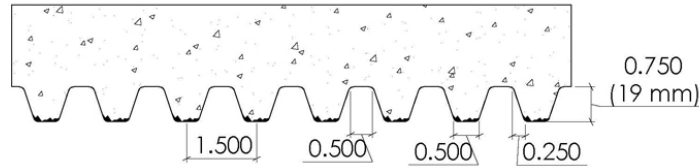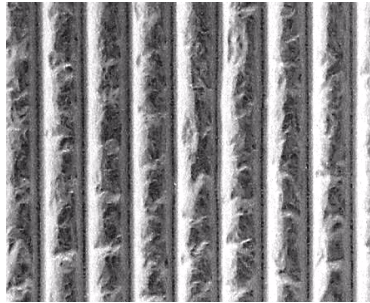

CONCRETE

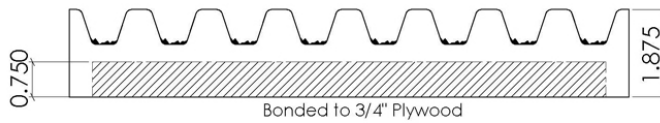

ElastoSpec™

Standard size 4'x8' and 4'x10'  
Custom sizes in 1.5' increments for width  
and lengths over 10'



ElastoSpec Lite™

Standard size 4'x8' and 4'x10'  
Custom sizes in 1.5' increments for width  
and lengths over 10'

Available Thicknesses:  
0.070, 0.090, 0.110, and 0.150



ThermoSpec™

Standard size 4'x8' and 4'x10'  
Custom sizes: any less than 4'x10'

Visit [www.specformliners.com](http://www.specformliners.com) for application guides and technical information

### ThermoSpec™ SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
<b>Material Weights - lbs/ft<sup>2</sup></b>		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843

### ElastoSpec Lite™ Semi-Elastomeric MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
<b>Material Weights - lbs/ft<sup>2</sup></b>		
Varies by Pattern		

### ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
<b>Material Weights - lbs/ft<sup>2</sup></b>		
Varies by Pattern		

Call for ThermoSpec™ Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available

ElastoSpec™ Customized Panel Sizes and Art Panels